



Globe COB 3000

Technical specification

Pendulum with incorporated electronic gear for LED lamps. High quality lenses with different beam spreads.

Model and colors Lampshade available in brushed aluminium. Mounting for monopoint or track. Cable always in black. Extendable cable 6m.

Area of use Pendulum for indoor applications.

Technical data

Mains (input) voltage	120V
Total weight	9,75 lbs
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	PMMA
Beam spreads	Spot, Medium, Flood

Spot		Medium		Flood	
17°		23°		38°	
ft	ø	ft	ø	ft	ø
1.5	0.45	1.5	0.62	1.5	1.04
6.0	1.81	6.0	2.49	6.0	4.18
10.5	3.18	10.5	4.35	10.5	7.31




Art no	Description	Color
221-7530-20	Globe COB, Spot	Black
221-7530-32	Globe COB , Spot	Dark Grey
221-7531-20	Globe COB, Medium	Black
221-7531-32	Globe COB , Medium	Dark Grey
221-7532-20	Globe COB , Flood	Black
221-7532-32	Globe COB, Flood	Dark Grey
054-770-10	Monopoint with Bracket	White
054-770-20	Monopoint with Bracket	Black
054-770-30	Monopoint with Bracket	Grey
054-xx-10	Track bracket	White
054-xx-20	Track bracket	Black

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	2750	30	A+
930	2650	30	A+
840	2700	26	A+
940	2650	30	A+

Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity.

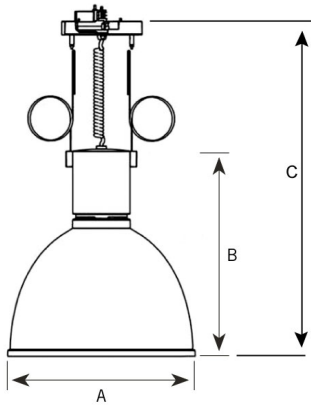

A 16,71 B 18,91 C 23,64 (inch)



Globe COB 4000

Technical specification

Pendulum with incorporated electronic gear for LED lamps. High quality lenses with different beam spreads.

Model and colors Lampshade available in brushed aluminium. Mounting for monopoint or track. Cable always in black.


Area of use Pendulum for indoor applications.

Technical data

Mains (input) voltage	120V
Total weight	9,75 lbs
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	Transparent Polycarbonate
Beam spreads	Spot, Medium, Flood



Art no	Description	Color
221-7540-20	Globe COB , Spot	Black
221-7540-32	Globe COB , Spot	Dark Grey
221-7541-20	Globe COB , Medium	Black
221-7541-32	Globe COB , Medium	Dark Grey
221-7542-20	Globe COB , Flood	Black
221-7542-32	Globe COB , Flood	Dark Grey
054-770-10	Monopoint with Bracket	White
054-770-20	Monopoint with Bracket	Black
054-770-30	Monopoint with Bracket	Grey
054-xx-10	Track bracket	White
054-xx-20	Track bracket	Black

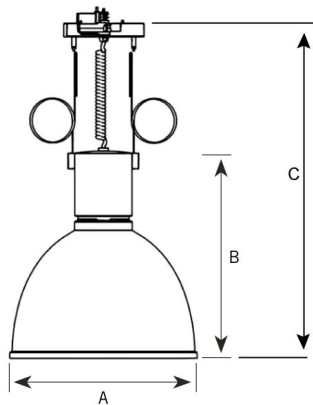

A 16,71 B 18,91 C 23,64 (inch)

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	3750	39	A+
930	3950	41	A+
840	4150	39	A++
940	3600	39	A+

Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity.



Pendix R COB 2000

Technical specification

Pendulum for LED lamps. High quality cylindrical reflector with spot, medium or flood beam spread. Housing of sheet metal.

Model and colors Available in white, black or grey. Cable length 4m.



Area of use Pendant for wire or ceiling mount.

Technical data

Mains (input) voltage	120V
Total weight	5,5 lbs
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical
Driver	Electronic, built in
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
290-7500-10	Spot	White
290-7500-20	Spot	Black
290-7500-30	Spot	Grey
290-7501-10	Medium	White
290-7501-20	Medium	Black
290-7501-30	Medium	Grey
290-7502-10	Flood	White
290-7502-20	Flood	Black
290-7502-30	Flood	Grey

Spot		Medium		Flood	
14°		28°		39°	
ft	ø	ft	ø	ft	ø
1.5	0.37	1.5	0.75	1.5	1.07
6.0	1.47	6.0	2.99	6.0	4.30
10.5	2.58	10.5	5.24	10.5	7.52

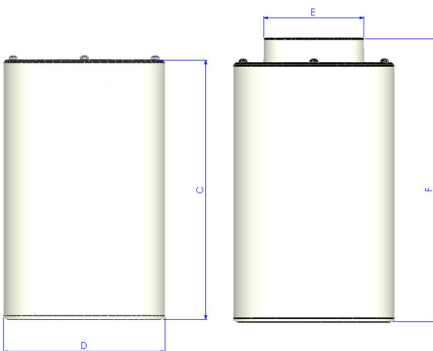

A 4,61 B 1,93 C 10,09 D 6,26 E 3,9 (inch)

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	1800	17	A++
930	1700	19	A+
840	1750	15	A++
940	1700	17	A+

Note

Product is title 24 compatible.

Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.



Pendix R COB 3000

Technical specification

Pendulum for LED lamps. High quality cylindrical reflector with spot, medium or flood beam spread. Housing of sheet metal.

Model and colors Available in white, black or grey. Cable length 4m.


Area of use Pendant for wire or ceiling mount.

Technical data

Mains (input) voltage	120V
Total weight	5,5 lbs
Color rendering index (CRI)	90
Light source	LED
Operating position	Vertical
Driver	Electronic, built in
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
290-7510-10	Spot	White
290-7510-20	Spot	Black
290-7510-30	Spot	Grey
290-7511-10	Medium	White
290-7511-20	Medium	Black
290-7511-30	Medium	Grey
290-7512-10	Flood	White
290-7512-20	Flood	Black
290-7512-30	Flood	Grey
290-7513-10	Wide flood	White
290-7513-20	Wide flood	Black
290-7513-30	Wide flood	Grey

Spot		Medium		Flood		Wide Flood	
14°		28°		39°		54°	
ft	ø	ft	ø	ft	ø	ft	ø
1.5	0.37	1.5	0.75	1.5	1.07	1.5	1.53
6.0	1.47	6.0	2.99	6.0	4.30	6.0	6.11
10.5	2.58	10.5	5.24	10.5	7.52	10.5	10.70

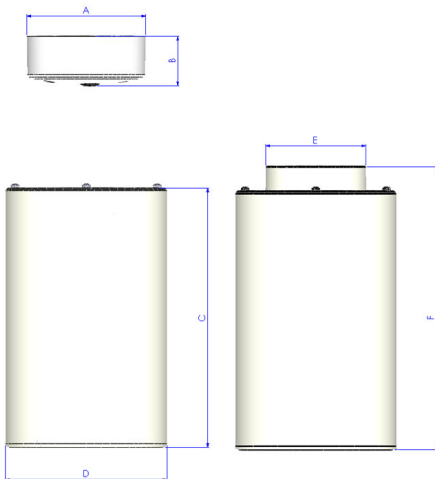

A 4,61 B 1,93 C 10,09 D 6,26 E 3,9 (inch)

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	3100	29	A++
930	2700	29	A+
840	3300	29	A++
940	2800	29	A+

Note

Product is title 24 compatible.

Product available with meat or bread filter.

Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.